



BATTERY BACKUP

Battery Backup Device

Product Datasheet



- ▶ Provides Instant Battery Power
- ▶ Allows Continued Protection
- ▶ LED Lighting provides Fast Identification of the Device
- ▶ Easy to Use

Description

The TTK BATTERY BACKUP provides instant battery power to your liquid leak monitoring units in case of power disruption.

It is designed to be used with TTK monitoring units such as FG-NET, FG-BBOX, FG-RELAYS, FG-SYS, FG-ALS8, FG-ALS4 and FG-A, provides uninterrupted power supply for your TTK devices, allowing you to maintain protection leak protection on your site.

In the event of a power outage, the TTK logo on the front panel of the BATTERY BACKUP enclosure turns red, indicating the system is running on battery. When the mains power supply returns, the LED will automatically turn off.

Features & Benefits

FEATURES

- The BATTERY BACKUP device is separate to the BATTERY itself.
- The BATTERY BACKUP enclosure (wall mounted version only available) is ready to connect and compatible with universal lead acid batteries.
- When a BATTERY is ordered, TTK will also provide a rechargeable lead acid battery (reference: Yuasa NP7-12, 7Ah, 12V) which has a running time of 4 hours when used with our FG-NET panel.



BENEFITS

- Easy to use.
- LED lighting provided fast identification of the device's real-time status.
- Provides uninterrupted power supply for your TTK devices.
- Allows you to maintain leak protection on your site in the case of power disruption.

Technical Data of BACKUP Device

Compatibility	Compatible without modification to monitoring units: FG-NET, FG-BBOX, FG-RELAYS, FG-A Compatible with modification of the panel for 12VDC to monitoring units: FG-SYS, FG-ALS8, FG-ALS4
Dimensions	9.17" W x 9.13" H x 3.38" D (233 mmW x 232mmH x 86mmD)
Supply Voltage	100-240VAC 1.6A 50/60Hz
Maximum Power Consumption	15W
Working Temperature Range	5° to 131°F (-15° to +55°C)
Working Humidity Range	5% to 80% non-condensing
Ingress Protection	IP40 - indoor use only

Product Diagrams & Connection Diagrams

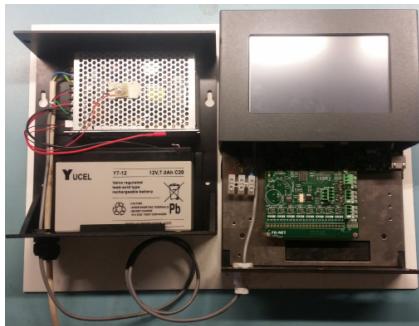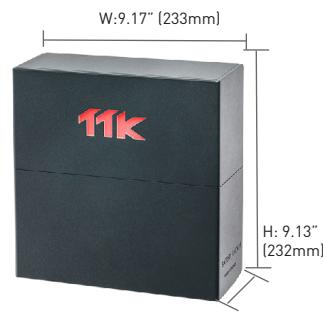

Example of connection between Battery backup and FG-NET digital unit



Example of connection between Battery backup and FG-SYS digital unit

Technical Data of BATTERY

Voltage (V)	12
Capacity (Ah)	7
Technology	Lead
Weight	5.95 lb (2.7 kg)
Dimension	5.94" W x 3.85" H x 2.56" D (151mmW x 98mmH x65mmD)
Type of terminals	Faston 0.18 in (4.7 mm)
Model	Original manufacturer



Identification Codes

BACKUP	Battery Backup Enclosure 4 Hours without Battery
BATTERY	Battery for Backup Enclosure

Certificates



All the connections in the Battery Backup must be done with the power supply switched off.
Read carefully the installation procedure for the FG-NET digital unit.

This brochure has been carefully prepared to ensure technical accuracy but is only intended for promotional use. TTK cannot guarantee that the information contained herein contains no errors or omissions, and hence does not accept responsibility related to the use of its equipment. TTK maintain its obligations set forth in the Standard Terms and Conditions of Sale and will not, under any circumstances, assume liability for any incidental damages, indirect or consequential, arising from the sale, resale, use or misuse of this product. The purchaser(s) accept their responsibility as the sole judge(s) of the adaptability of the product for the intended use.

FG-NET, FG-SYS and TOPSurveillance are trademarks of TTK S.A.S. © TTK 2026